

TEPB0R2V09B1X

POLYMER ESD SUPPRESSORS

1. Generals


- This device is an ultra low capacitance PESD Product designed to protect very high speed data interfaces
TEPB0R2V09B1X has a typical capacitance of only 0.2pf(I/O to GND), and it can be used to meet the ESD immunity requirements of IEC61000-4-2(15KV air,8KV contact discharge)

2. Feature

- ESD protection for high speed data lines to IEC61000-4-2
- ESD contact discharge typical 8KV, max 15KV
- ESD air discharge typical 15KV, max 25KV
- Multilayer structure
- Surface mount
- Extremely low capacitance
- Very low leakage current
- Fast response time
- Bi-directional ESD protection
- Lead free solder termination
- The best ESD protection for high frequency, low voltage applications

3. Application

- High Definition Multi-Media Interface (HDMI)
- Digital Visual Interface (DVI)
- Display Port Interface (DP)
- Unified Display Interface (UDI)
- Mobile Display Digital Interface (MDDI)
- Gigabit Ethernet
- USB2.0 and USB3.0
- IEEE1394 interface



Bidirectional

4. Part Number System

$\overline{\text{T}}$ $\overline{\text{E}}$ $\overline{\text{P}}$ $\overline{\text{B}}$ $\overline{\text{0R2}}$ $\overline{\text{V09}}$ $\overline{\text{B}}$ $\overline{\text{1X}}$
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Company Name: TOP-EMC
- ② Product Function: ESD
- ③ Material Type: Polymer
- ④ Chip Size (EIA): B(0402),C(0603)
- ⑤ Capacitance: 0R2=0.2PF,1R0=1.0PF,5R0=5.0PF
- ⑥ Working Voltage: V05=5V,V12=12V,V24=24V
- ⑦ Direction Type: Bidirectional
- ⑧ Lines Protected: 1X=1 line

5. Absolute Maximum Ratings



Parameter	Symbol	Value	Unit
Maximum Contact discharge voltage Per IEC61000-4-2	---	15KV	V
Maximum Air discharge voltage Per IEC61000-4-2	---	25KV	V
Maximum Operating temperature	T _{OPER}	-40 to +90	°C
Maximum Storage temperature	T _{STG}	-55 to +125	°C
Maximum lead temperature for soldering during 10s	T _L	260	°C

6. Electrical Characteristics(T_A=25°C)


Parameter	Symbol	Typ	Max	Units
Rated Voltage	V _R	---	9	V
Trigger voltage	V _T	250	---	V
Clamping voltage	V _C	25	---	V
Leakage current	I _L	0.1		uA
Capacitance	C _P	0.20	0.25	pF

- Note:**
1. Trigger and clamping voltage are measured per IEC 61000-4-2, 8KV contact discharge method.
 2. After reliability tests such as high temp storage, temp cycles, continuous ESD strike etc, the maximum leakage current is less than 10uA.

7. ESD Clamping Test Waveforms

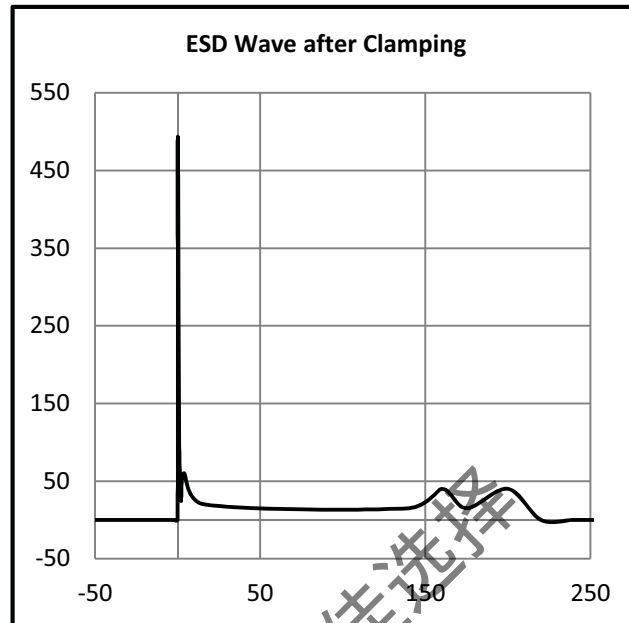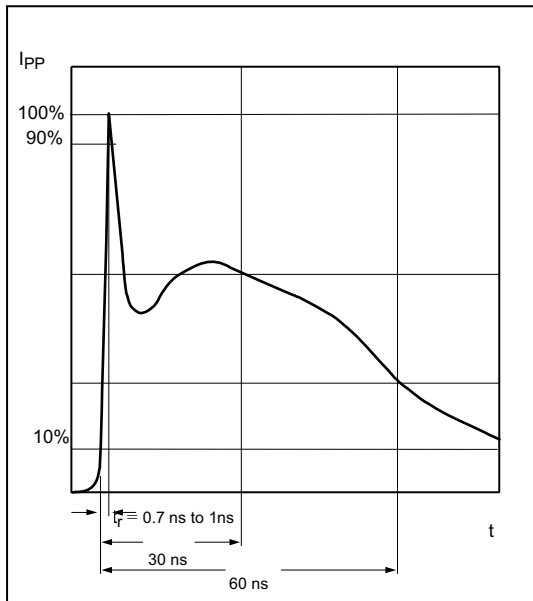


8. Product Dimension

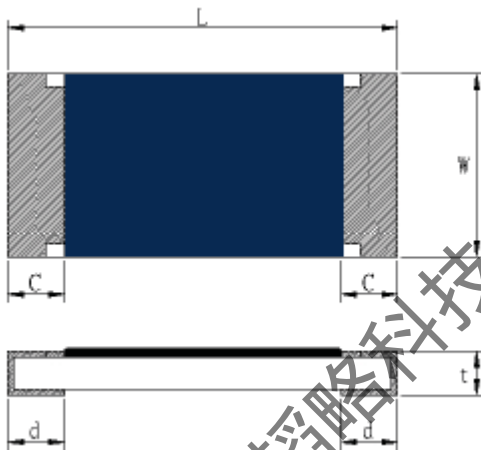

Type	Dimensions(mm)				
	L	W	C	d	t
0402	1.0±0.1	0.52±0.05	0.2±0.1	0.25±0.1	0.36±0.05
0603	1.6±0.1	0.8±0.1	0.3±0.2	0.35±0.2	0.45±0.1


Environmental Specification	Reference Standard	Test Condition	Specification
Operating temperature		-55°C to 125°C	IL<1μA ¹
Full load voltage		85°C for 1000 hrs at working voltage	
Resistance of solder heat	MIL-STD-202 Method 210	260 ± 5°C for 10 ± 1 sec	
Thermal shock	MIL-STD-202 Method 107	-55°C to 125°C, 5 cycles	
Moisture resistance	MIL-STD-883, Method 1004.7	85%RH, 85°C for 1000hrs at working voltage	
Solderability	MIL-STD-202, Method 208	245 ± 5°C solder, 2 ± 0.5 sec dwell. Solder: Sn96.5/Ag3.0/Cu0.5	95% coverage

9. Solder Reflow Recommendations

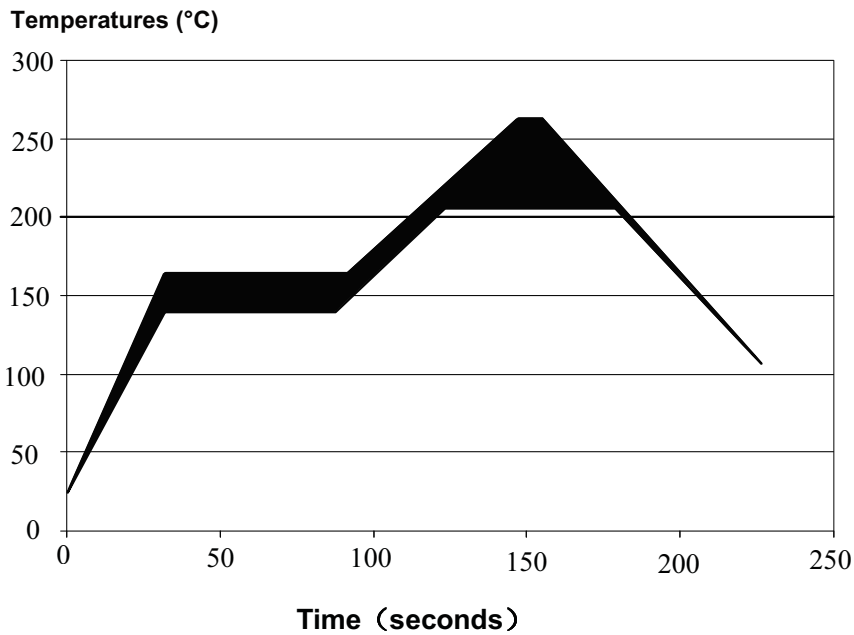

10. Package Information

4 mm pitch paper

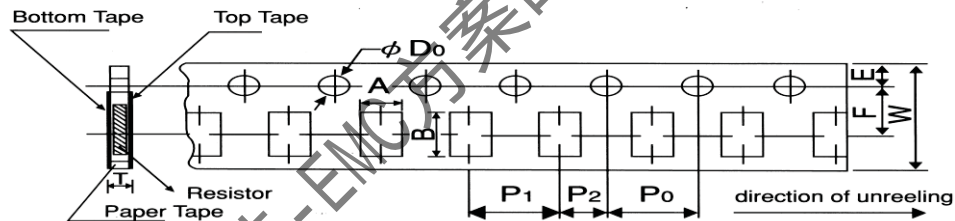

Packing	Type	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀	T
Paper Tape	TEPB	0.7±0.05	1.2±0.05	8.0±0.2	3.5±0.05	1.75±0.1	2.0±0.1	2.0±0.05	4.0±0.1	φ1.5 ^{+0.1} ₀	0.45±0.1



Unit: mm

Type	Size	Paper Tape
		2 mm Pitch
		180mm/R
TEPB	04	10000

Unit: pcs

- 6.1 Carrier tape and transparent cover tape should be heat-sealed to carry the products, and the reel should be used to reel the carrier tape.
- 6.2 The adhesion of the heat-sealed cover tape shall be 40±30grams.
- 6.3 Both the head and the end portion of the taping shall be empty for reel package and SMT auto-pickup machine. And a normal paper tape shall be connected in the head of taping for the operator to handle.

TEPB0R2V09B1X

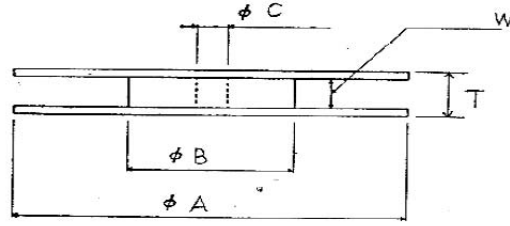

Series	ϕA	ϕB	ϕC	W	T
0402	180 ⁺⁰	60 min	13.0±1.0	9.0±1.0	11.4±2.0
0603	-3				

11. Order Information

Device	Package	Quantity	HSF Status
TEPB0R2V09B1X	0402	10,000pcs/reel	RoHS compliant

12. Contact Information

SHENZHEN TOP-FLIGHT TECHNOLOGY CO.,LTD

4th Floor, C Building, Quansen Industrial Park, Bulong Road, Longhua New District, Shenzhen

Tel: 86-755-82908191 Fax: 86-755-82908701 Email:kang@topleve.com

Website: <http://www.topleve.com>

韬略科技 EMC 方案的最佳选择