


Molding Power Inductors

THMPI141305 Series

TOP-EMC

FEATURES

- Shielded construction
- Low loss realized with low DCR
- High performance (Isat) realized by metal dust core.
- Ultra low buzz noise, due to composite construction.
- RoHS, Halogen Free and REACH Compliance
- High reliability -Reliability tests comply with AEC-Q200



APPLICATIONS

- Electric Power Steering
- ABS Control Units
- Battery powered devices
- Car Navigation Systems
- Meters/Alarms
- Car distance Control Units

PRODUCT IDENTIFICATION

THMPI
①

141305
②

D
③

R22
④

M
⑤

T
⑥

- ① Type : THMPI
- ② External Dimensions (L×W×H) [mm]= 141305
- ③ Feature Type: Differential
- ④ Nominal Inductance : R22=0.22μH
- ⑤ Inductance Tolerance :
K=±10%
M=±20%
N=±30%
- ⑥ Packing T=Tape Carrier Package







SPECIFICATIONS

Part No.	Inductance	DC Resistance		Heating Rating Current	Saturation Current
	L0 (μH)	DCR (mΩ)		Idc (A)	Isat (A)
	±20 %, 100 kHz, 1V	TYP.	MAX.	TYP.	TYP.
THMPI141305DR22MT	0.22	0.5	0.7	50.0	75.0
THMPI141305DR36MT	0.36	0.74	0.85	42.0	50.0
THMPI141305DR50MT	0.5	1.1	1.15	38.0	48.0
THMPI141305DR68MT	0.68	1.35	1.55	33.0	46.0
THMPI141305DR82MT	0.82	1.45	1.67	30.0	39.0
THMPI141305D1R0MT	1.0	1.9	2.2	26.0	35.0
THMPI141305D1R5MT	1.5	2.8	3.2	23.0	33.0
THMPI141305D2R2MT	2.2	4.0	5.0	15.0	24.0
THMPI141305D3R3MT	3.3	5.9	7.0	14.0	22.0
THMPI141305D4R7MT	4.7	8.2	9.0	13.0	21.0
THMPI141305D6R8MT	6.8	14.5	18.0	12.0	16.0
THMPI141305D100MT	10.0	19.0	22.0	9.0	12.0
THMPI141305D150MT	15.0	23.0	30.0	8.0	10.0
THMPI141305D220MT	22.0	51.0	58.0	4.5	6.5
THMPI141305D330MT	33.0	75.0	84.0	3.5	6.0
THMPI141305D470MT	47.0	116.0	130.0	3.0	5.0







Notes

1. All test data is referenced to 25 °C ambient
2. Operating temperature range - 55 °C to + 125 °C
3. Idc(A):DC current (A) that will cause an approximate ΔT of 40 °C(reference ambient temperature is 25°C)
4. Isat(A):DC current (A) that will cause L0 to drop approximately 30 %
5. The part temperature (ambient + temp rise) should not exceed 125 °C under worst case operating conditions.
Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.


Graph

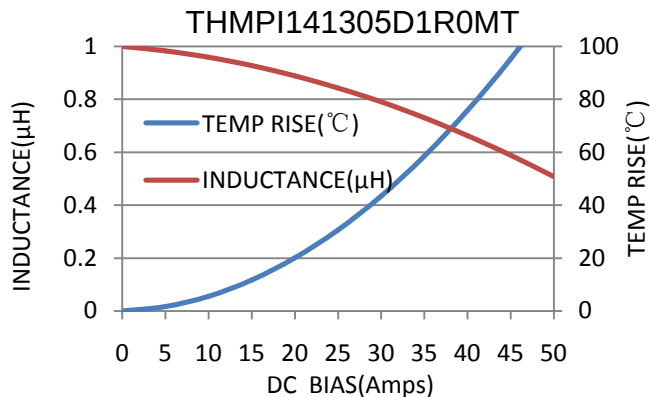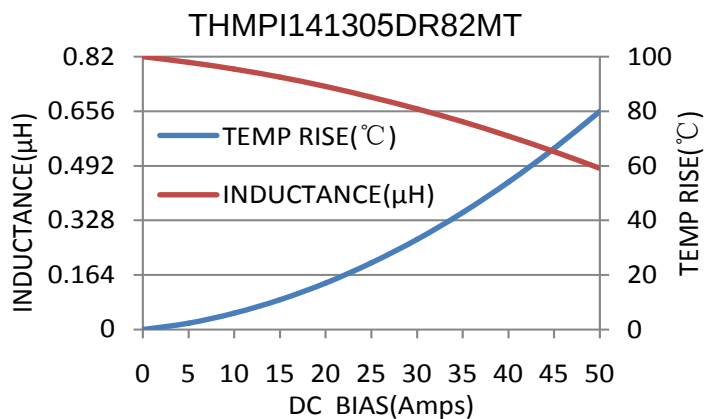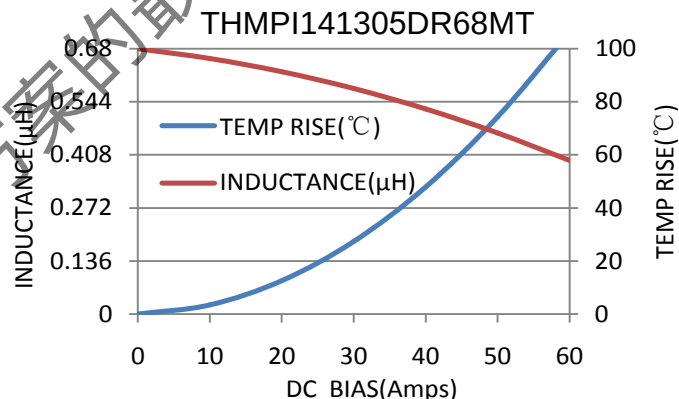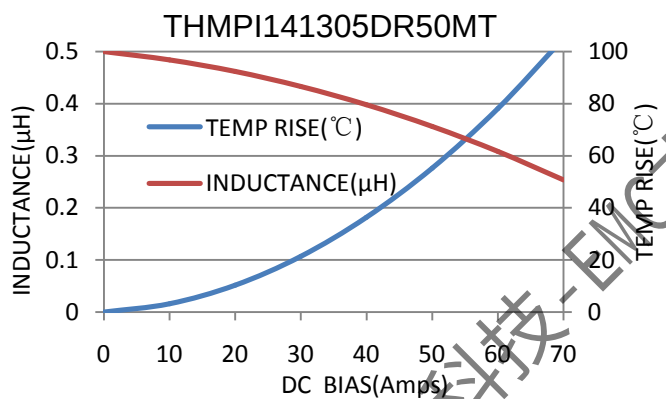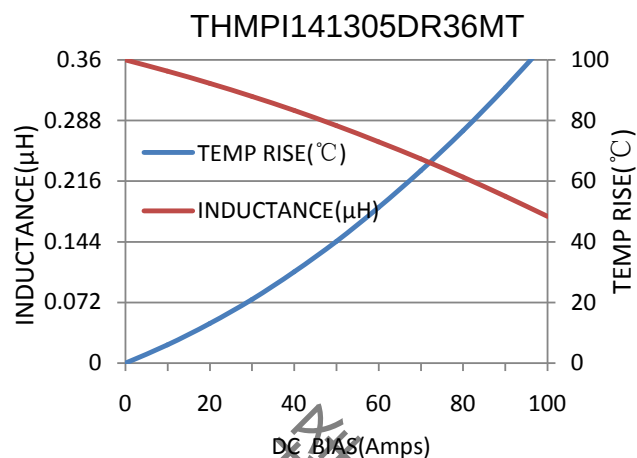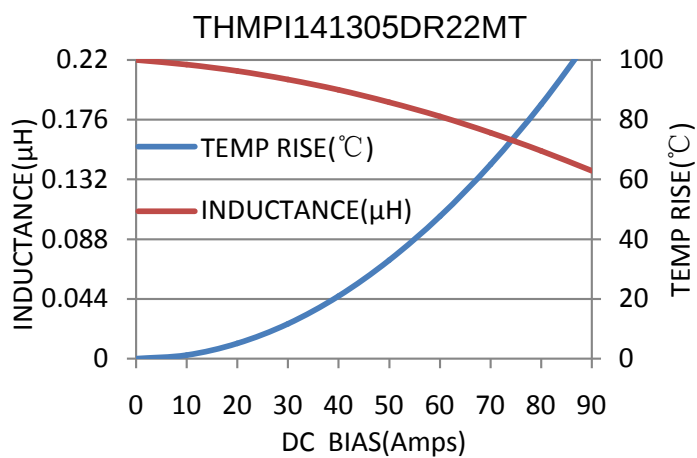


Graph

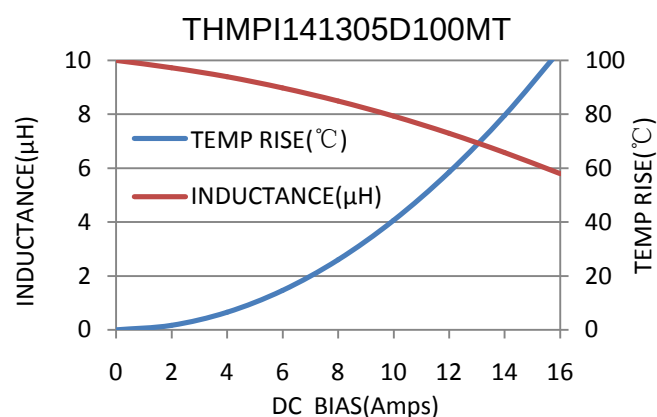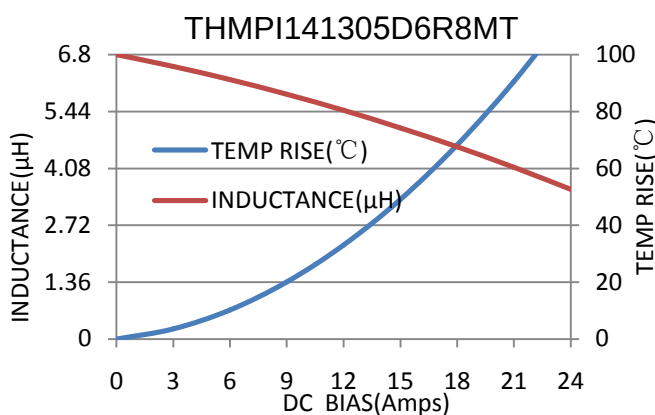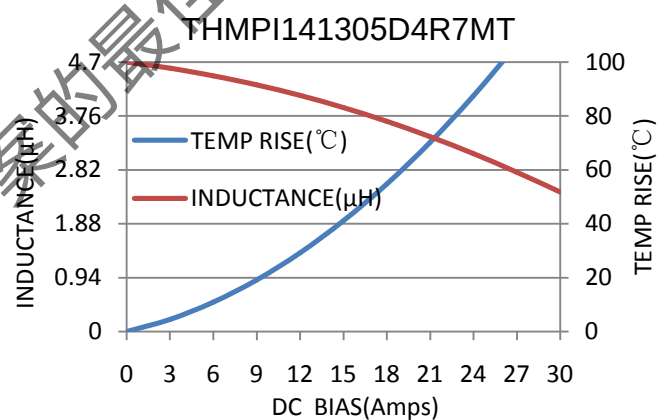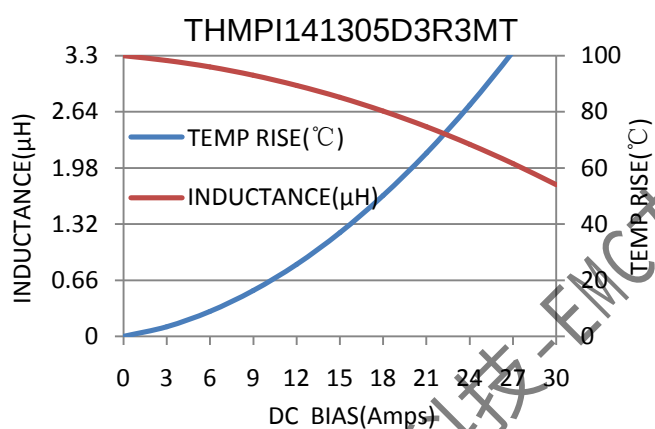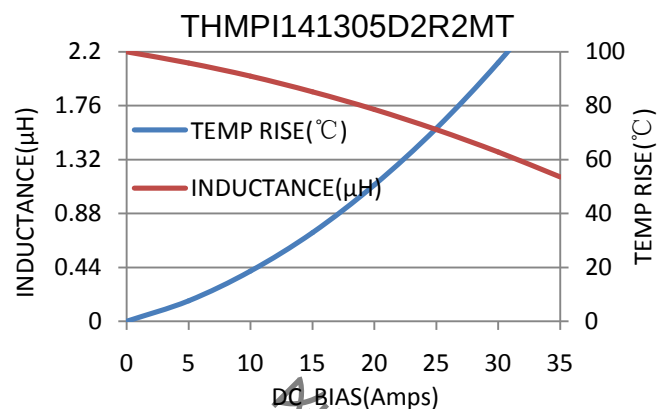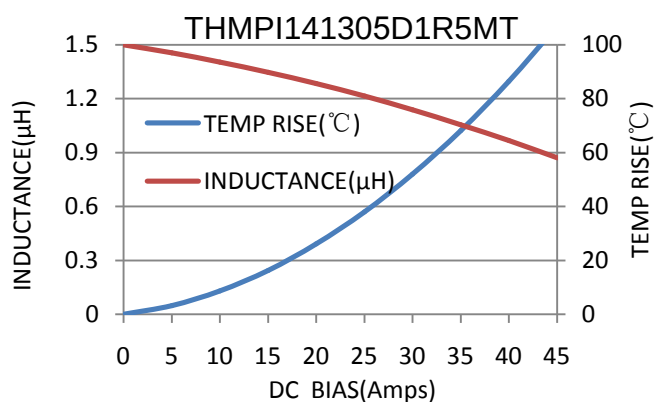


Graph

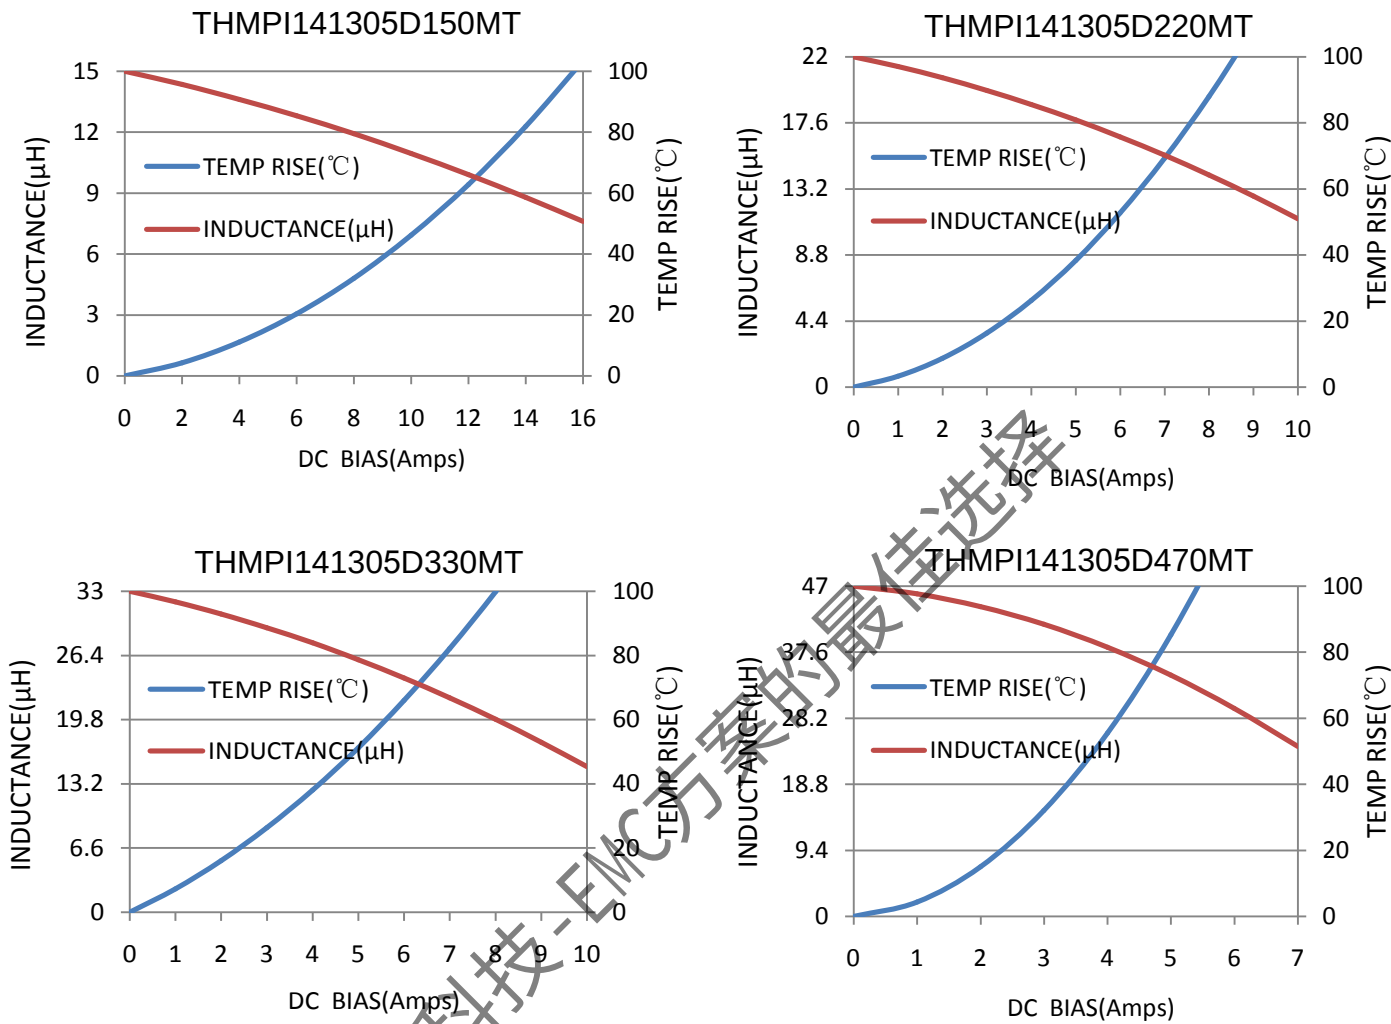

SHAPE AND DIMENSIONS (Dimensions in mm)

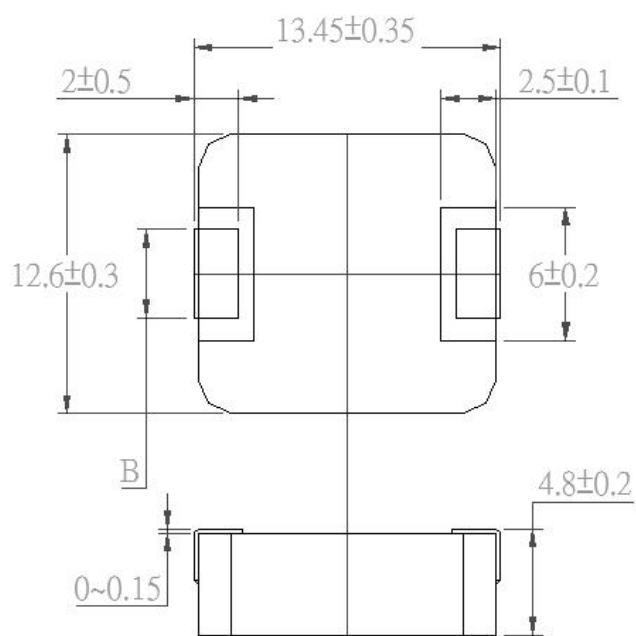


Code	Dimensions	
	R36/R50/R68 1R0/1R5/2R2	3R3/100/150 220/330/470
B	3.85 ± 0.5	5.0 ± 0.5

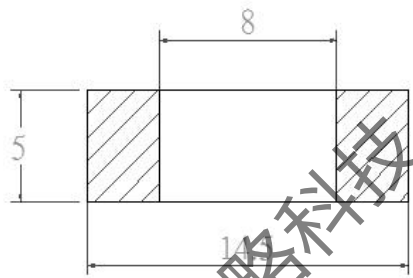

Recommend Land and Pattern Dimensions

RECOMMENDED SOLDERING TECHNOLOGIES

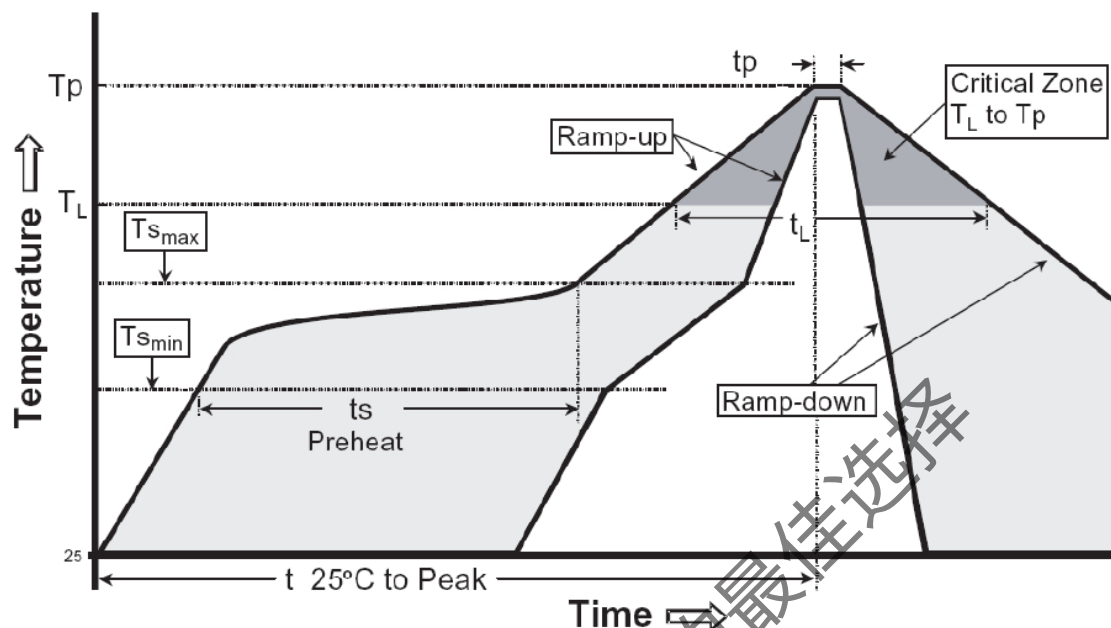

Profile Feature	Pb free Assembly
Average Ramp Rate (Ts max to Tp)	3 °C/second max
Preheat - Temperature Min (Ts_min) - Temperature Min (Ts_max) - Time (ts_min to ts_max)	150°C 200°C 60-180 seconds
Time maintained above: - Temperature (TL) - Time (tL)	217°C 60-150 seconds
Peak/Classification Temperature (Tp)	260 °C
Peak/Classification Time (Tp)	3-4 seconds
Time within 5 °C of actual Peak Temperature (Tp)	20-40 seconds
Ramp-Down Rate	6 °C/second max.
Time 25°C to Peak Temperature	8 minutes max

CONTACT INFORMATION

SHENZHEN TOP-FLIGHT TECHNOLOGY CO.,LTD

4th Floor, C Building, Quansen Industrial Park , Bulong Road, Longhua New District, Shenzhen

Tel: 86-755-82908191 Fax: 86-755-82908701 Email: kang@topleve.com

Website: <http://www.topleve.com>